




## Description

The JOR213 PhotoRelay consist of a MOSFET、Photoelectric generator optically coupled to an infrared LED 。

## Block Diagram and Package

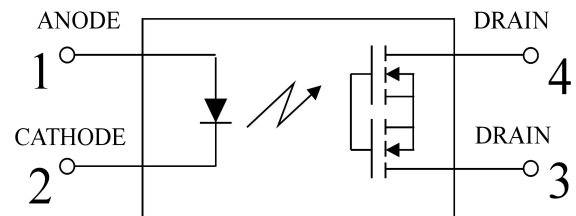

## Features

- Normally opened (SPST)
- Control 100V AC or DC voltage
- Switch 1.25A load
- Controls low-level analog sings
- High sensitivity, low conductivity resistance
- Low-level off state leakage current
- High isolation voltage 3750V
- Lead free, meet RoHS standards

## PIN DEFINITION

- 1:Anode(LED)
- 2:Cathode(LED)
- 3,4:Drain(MOSFET)



## Applications

- Communications products (personal computers, laptops)
- Modem/sensor
- Mobile phones/security equipment
- Measuring and testing equipment
- Plant automation equipment
- High-speed inspection machines

## PACKAGE OUTLINE



SOP4

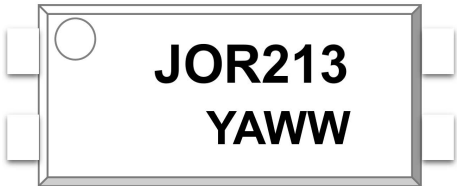ORDERING AND MARKING INFORMATION	
MARKING INFORMATION	
 <p><b>JOR213</b> <b>YAWW</b></p>	<p><b>JOR</b> : Company Abbr.  <b>213</b> : Part Number  <b>Y</b> : Fiscal Year  <b>A</b> : Manufacturing Code  <b>WW</b> : Work Week</p>
ORDERING INFORMATION	LABEL INFORMATION
<p><b>JOR213(Y)(Z)-G</b>  <b>JOR</b> – Company Abbr  <b>213</b> – Part Number  <b>Y</b> – Lead Form Option (M/S/SL/None)  <b>Z</b> – Tape and Reel Option (T1/T2)  <b>G</b> – Green</p>	

**Absolute Maximum Ratings (T<sub>A</sub>=25°C)**

Parameter		Symbol	Rating	Unit	Note
Input	LED Forward Current	I <sub>F</sub>	50	mA	
	LED Reverse Voltage	V <sub>R</sub>	5	V	
	Peak Forward Current	I <sub>FP</sub>	1	A	f =100 Hz, Duty factor= 0.1%
	Power Dissipation	P	75	mW	
Output	Load Voltage(peak AC)	V <sub>L</sub>	100	V	
	Continuous load current (peak AC)	I <sub>L</sub>	1.25	A	
	Peak load current	I <sub>peak</sub>	3.7	A	100 ms (1 shot), V <sub>L</sub> = DC
	Power Dissipation	P <sub>out</sub>	800	mW	
I/O isolation voltage		V <sub>iso</sub>	3750	Vrms	
Temperature limits	Operating Temperature	T <sub>opr</sub>	-40 ~ + 85	°C	Non-condensing at low temp
	Storage Temperature	T <sub>stg</sub>	-40 ~ + 100		


**Electro-optical Characteristics (Ta=25°C)**

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	LED Forward current	$I_{Fon}$	$I_L=1.25A$	-	0.4	3	mA
	LED turn off current	$I_{Foff}$	$I_L=1.25A$	-	0.2	3	mA
	LED dropout voltage	$V_F$	$I_F=5mA$	1	1.3	1.4	V
Output	On resistance	$R_{on}$	$I_F=5mA,$ $I_L=1.25A,$ Within 1 s on time	-	0.48	1.5	$\Omega$
	Off state leakage current	$I_{Leak}$	$I_F=0mA, V_L=100V$	-	-	1000	nA
Transfer Characteristics	Turn on time	$T_{on}$	$I_F=5mA, I_L=1.25A$	-	117	1000	us
	Turn off time	$T_{off}$	$I_F=5mA, I_L=1.25A$	-	417	1000	us
	I/O capacitance	$C_{iso}$	$f=1MHz, V_B=0$	-	0.8	1.5	pF
	Initial I/O isolation resistance	$R_{iso}$	500V DC	1,000	-	-	M $\Omega$


Note: LED forward current recommendation value:  $I_F=5$  to 10mA

**Typical Performance Curves**


**Fig.1 Load current vs. Ambient temperature characteristics**

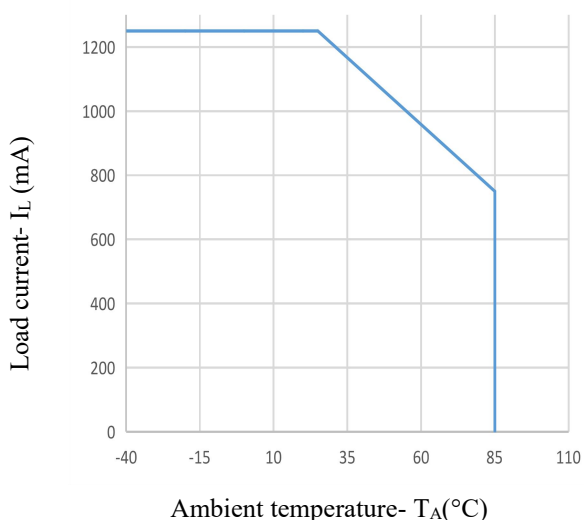


**Fig.2 On resistance vs. Ambient temperature characteristics**

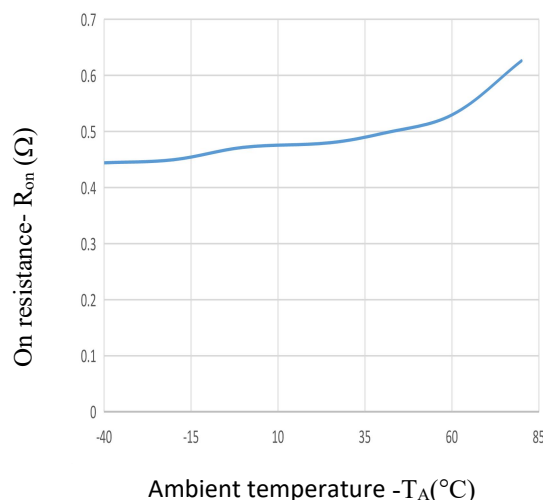


**Fig.3 Turn on time vs. Ambient temperature characteristics**

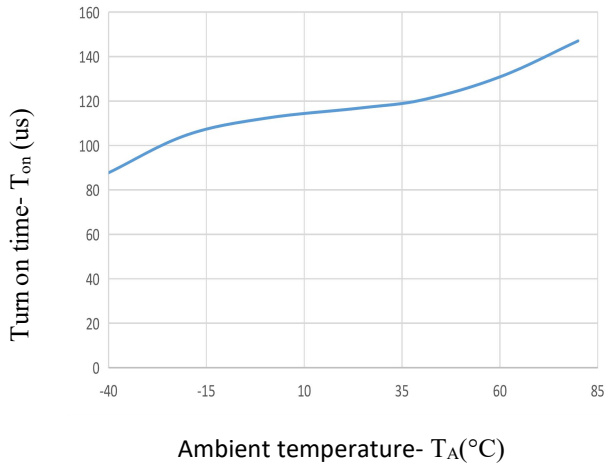


**Fig.4 Turn off time vs. Ambient temperature characteristics**

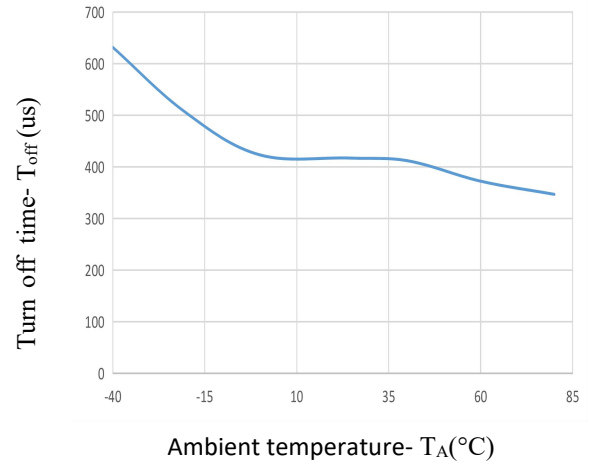


**Fig.5 LED Forward current vs. Ambient temperature characteristics**

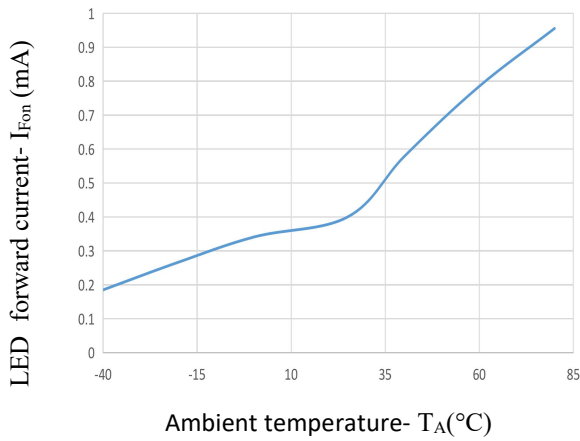


**Fig.6 LED turn off current vs. Ambient temperature characteristics**

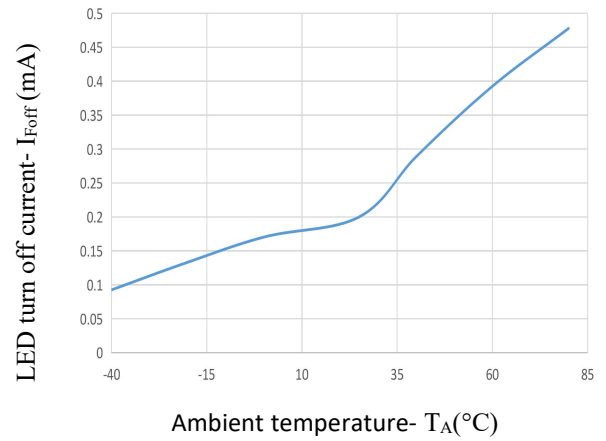


**Fig.7 LED dropout voltage vs. Ambient temperature characteristics**

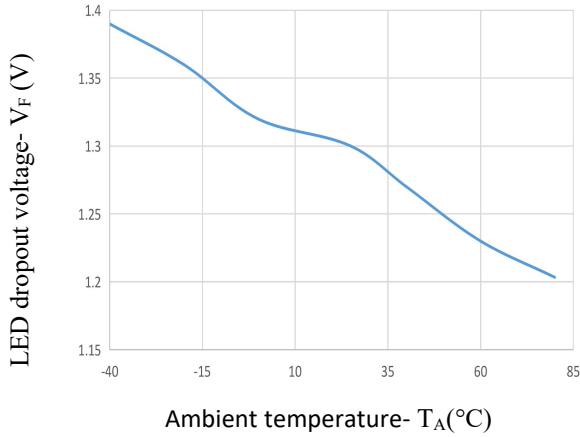


**Fig.8 Output current vs Output voltage**

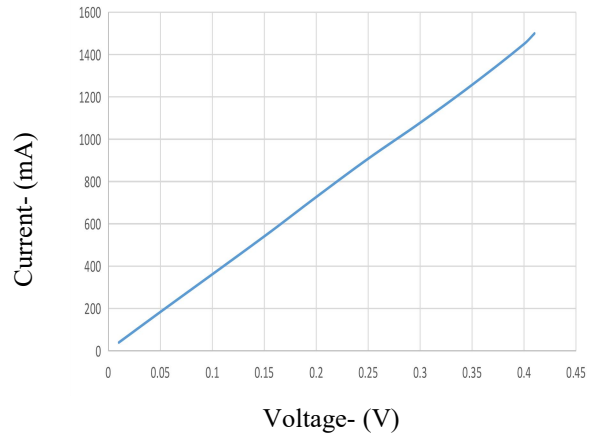


**Fig.9 Off state leakage current vs Load voltage characteristics**

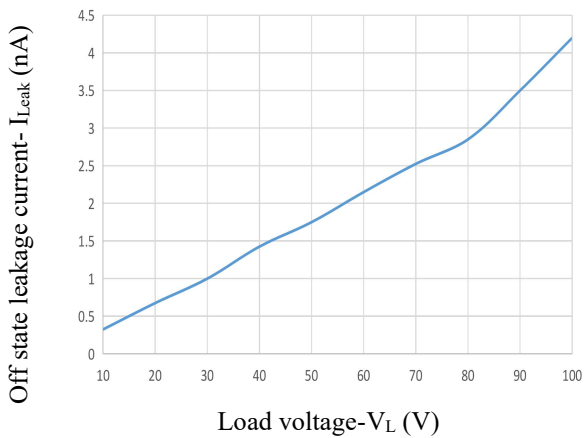


**Fig.10 LED turn on time vs Forward current characteristics**

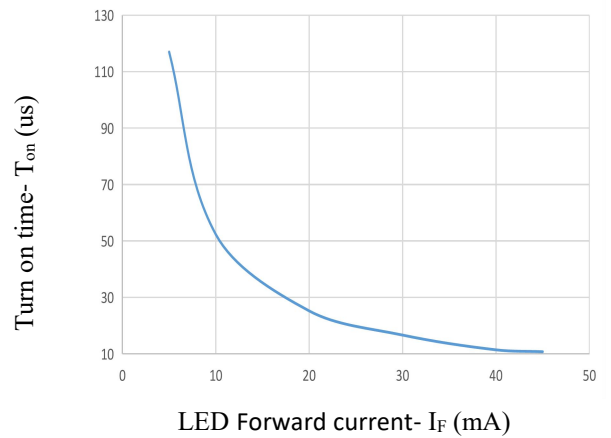


**Fig.11 LED turn off time vs Forward current characteristics**

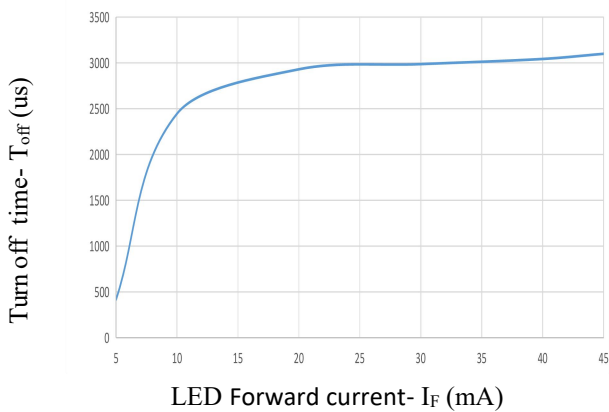

**Turn on/off time**

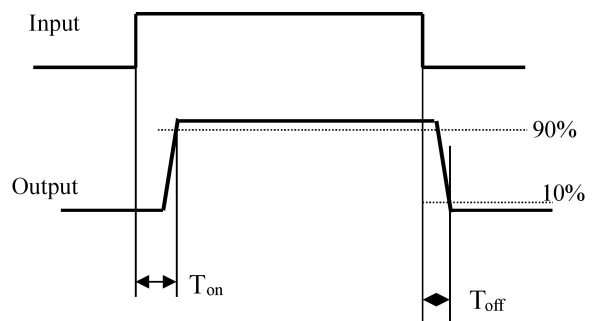

Solder Reflow Profile

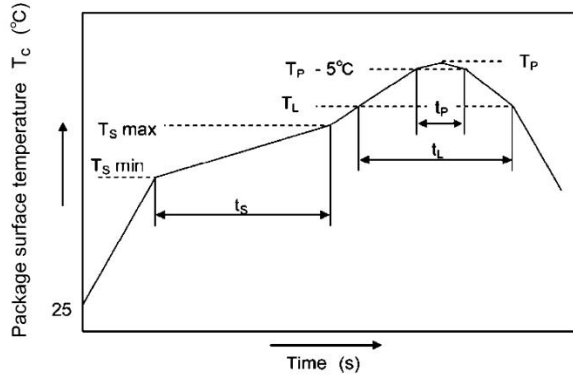


	Symbol	Min	Max	Unit
Preheat temperature	$T_s$	150	200	°C
Preheat time	$t_s$	60	120	s
Ramp-up rate ( $T_L$ to $T_P$ )			3	°C/s
Liquidus temperature	$T_L$	217		°C
Time above $T_L$	$t_L$	60	150	s
Peak temperature	$T_P$		260	°C
Time during which $T_c$ is between ( $T_P - 5$ ) and $T_P$	$t_p$		30	s
Ramp-down rate ( $T_P$ to $T_L$ )			6	°C/s

Note: The picture above is the front view of the product. (Unit: mm)


Outline Dimensions

Unit: mm

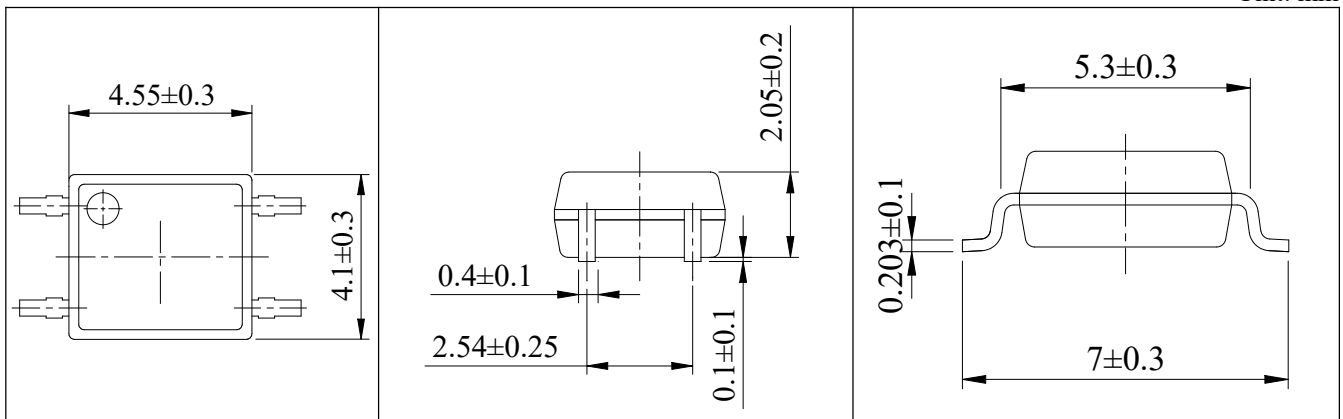

SOP4

Land Pattern Dimensions (for reference only)



Note: The picture above is the front view of the product. (Unit: mm)


**Packing**

■ Summary table

Package Type	Packing Form	Quantity per Reel	Quantity per Box	Quantity per Carton	Antistatic Bag Specification	Box Specification	Carton Specification	Note
SOP4	Reel( $\phi$ 330mm Blue)	3k pcs/reel	2 reels /box	10 boxes /ctn	380*380mm	340*60*340mm	620*360*365mm	Guard band 200mm min.

■ SOP4 (Reel)

- 1) Qty/reel: 3000 pcs. Qty/ctn: 60000 pcs.
- 2) Inner packing: 3000pcs/reel.
- 3) Schematic: (unit:mm)

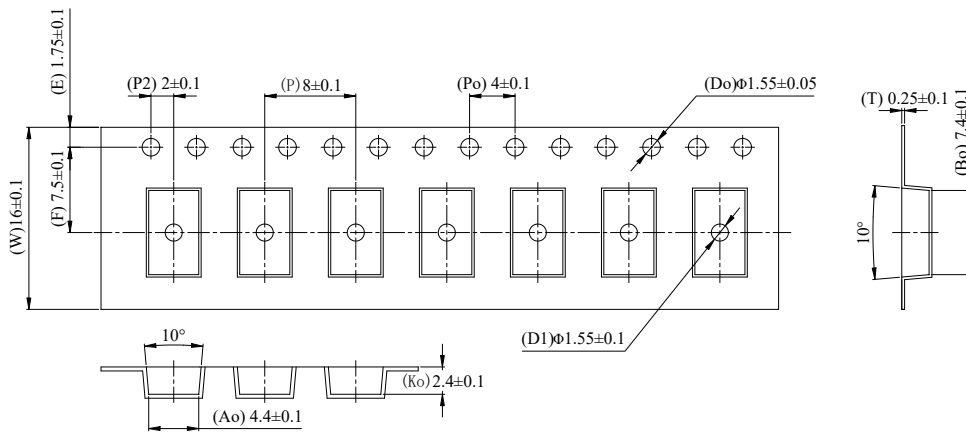

**Attention**

- JieJie continuously improve quality, reliability, function or design. We reserve the right to change this document without notice.
- Please use in accordance with the product specification. JieJie is not responsible for the quality problems caused by non-compliance with the product specifications.
- This product is not used in military, aircraft, automobile, medical, life support or life-saving equipment or devices that may cause personal injury or death. If you need high reliability products for the above specific equipment or device, please contact our sales staff for advice.
- If you have any questions about the contents of the document, please contact us.